



YET404PC-V4.0 (10Pin)

Four channel Wireless Intelligent Receiving Receiver

I. Main technical indexes

- **Voltage:** DC12V-30V
- **Working temperature:** -40℃~+80℃
- **Frequency:** 315MHz, 433MHz (optional)
- **Receiver capacity:** 500
- **Size:** 62×43.5×30mm
- **Static current:** ≤12mA
- **Sensitivity:** ≤-105dBm
- **Contact current:** ≤10A

II. Receiver's Feature

This product is a type of universal intelligent receiver and can be used with most wireless remote control sold on the market, including fixed code (2262, 2260, 2264, 5326, M1E, M5E, etc), learning code (1527, 2240, 6P20B, 6P20D, etc), rolling code (HCS301, HCS300, HCS200, HCS201, HCS100, HCS101, etc) and some customized 433MHz remote control (CAME etc).

III. Operation Method and Function Mode

Operating Learning button on Receiver can help users enter into different learning mode and realize different function mode. Relevant operation methods and functions are shown as the following table.

Times of Pressing Learning Button	Times of LED light Flicks	Output Channel	Control Mode
1	1	No1	Momentary
2	2	No2	Momentary
3	3	No3	Momentary
4	4	No4	Momentary
5	1	No1	Toggle
6	2	No2	Toggle
7	3	No3	Toggle
8	4	No4	Toggle
Above 8 times	4	No4	Toggle

IV. Eliminate Stored Information



Eliminate a single designated remote control:

Keeping pressing Deleting button for 3s and release, LED light flicks two times and then press the remote control to-be-eliminated, LED light will illuminate and it indicates that Remote control has been deleted down. www.szyet.com

Eliminate all information:

Keep pressing Deleting button for 10s, LED light will illuminate and it indicates that all memory/information has been deleted down.

V. Wiring Diagram

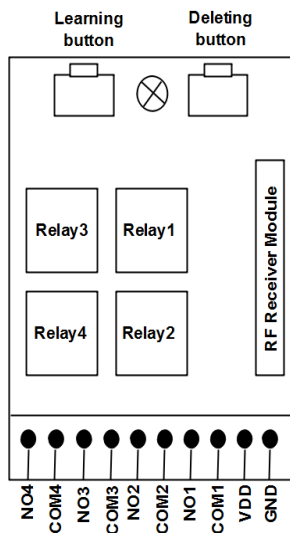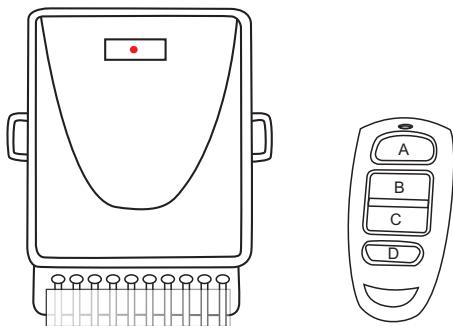

GND: -
VDD: +
COM1-COM4: Common Terminal of Relay1~Relay4
NO1: Normal Open of Relay1
NO2: Normal Open of Relay2
NO3: Normal Open of Relay3
NO4: Normal Open of Relay4